


Technical data sheet

VS03 – spare parts list

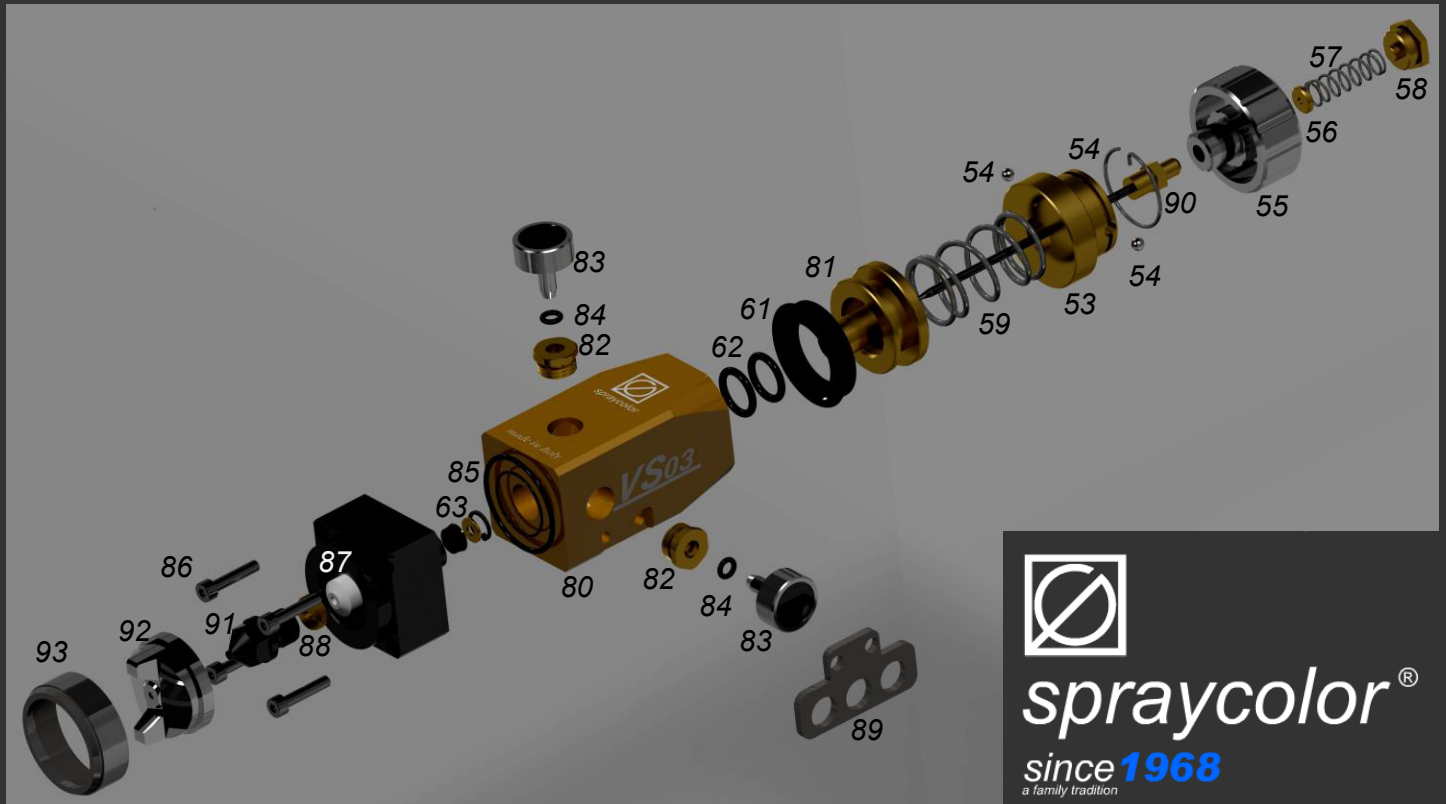

53. CYLINDER PLUG

54. BALLS+ELASTIC RING KIT

55. PAINT ADJUSTMENT KMOB

56. WASHER

57. ROD SPRING

58. SPRING PLUG

59. PISTON SPRING

61. PISTON GASKET

62. O-RING GASKET KIT (2 pieces)

63. GASKET+WASHER+SEEGER KIT

80. MAIN BODY

81. PISTON

82. AIR ADJUSTMENT SCREW

83. AIR VALVE NUT

84. O-RING GASKET

85. O-RING GASKET (4 pcs.)

86. M4x20 SCREWS (4 pcs.)

87. ROD GASKET

88. PRESS-GASKET SCREW

89. BODY HOLDER

90. ROD

91. NOZZLE

92. HEAD




93. HEAD NUT




VS03

DATASHEET

- HVLP -

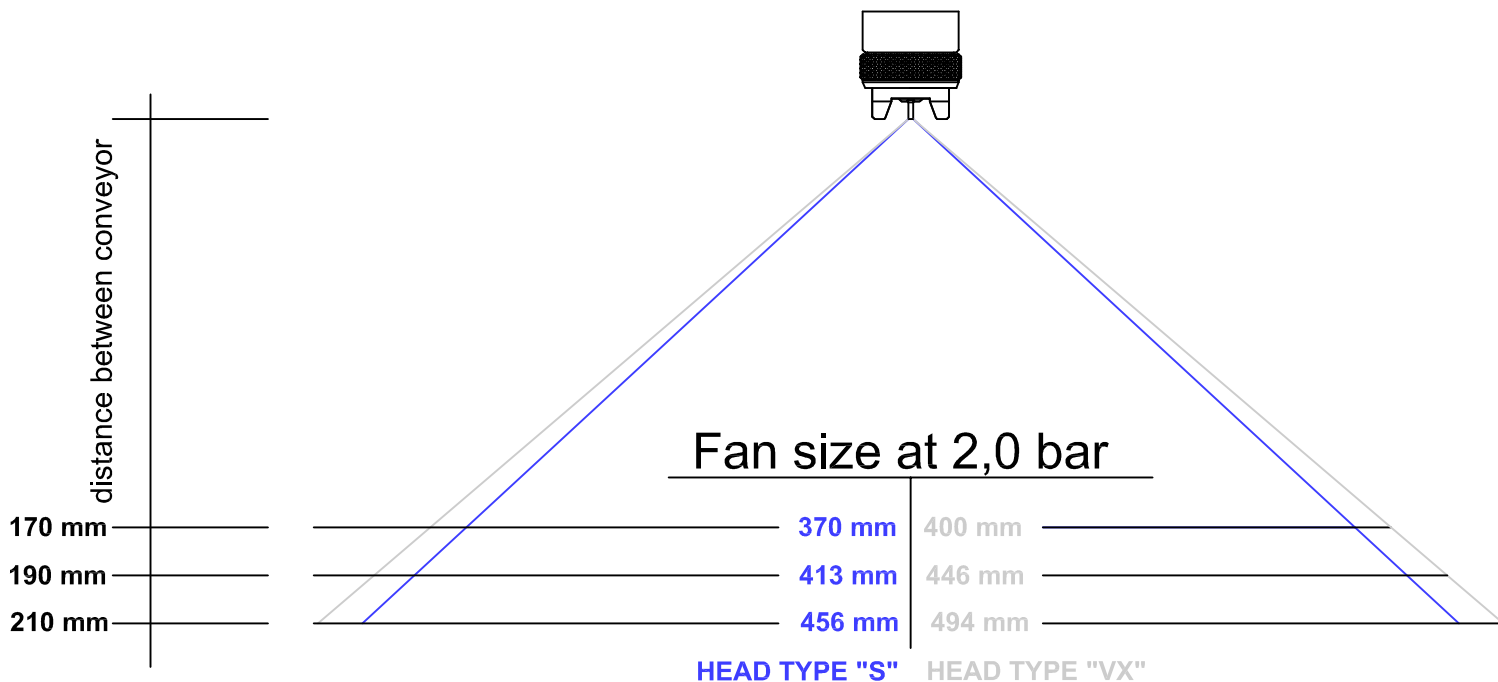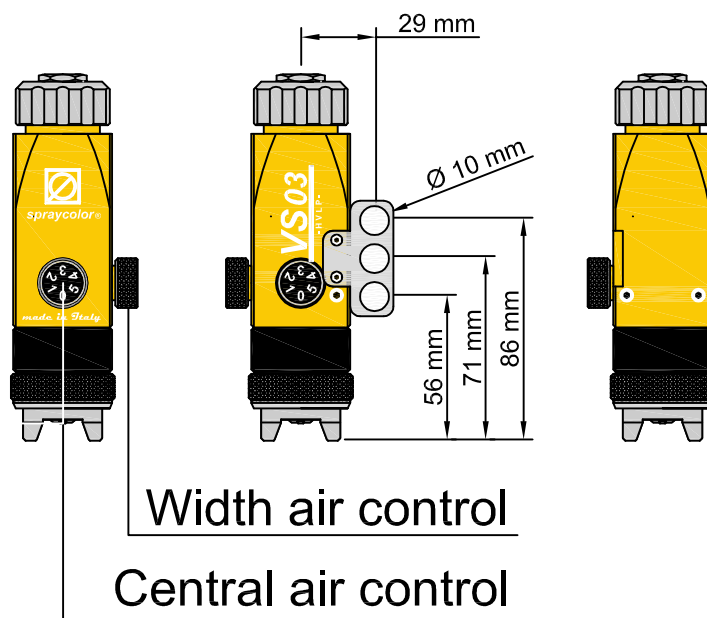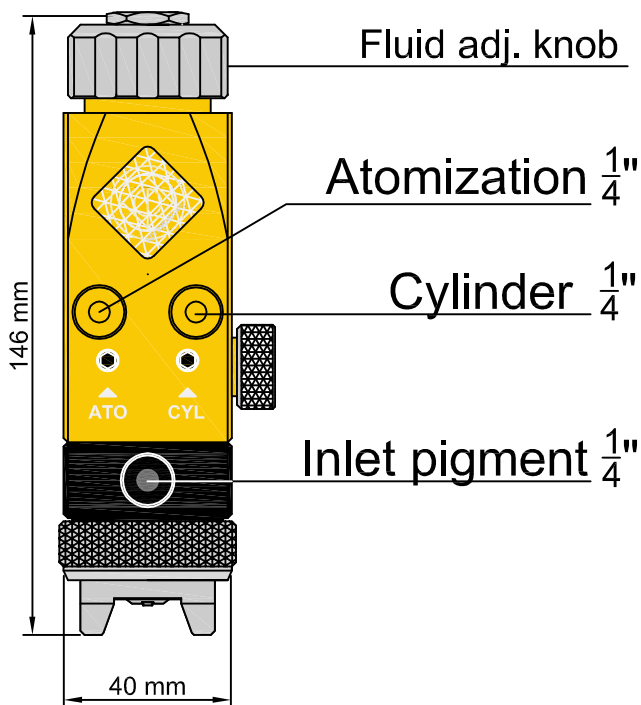

* Test with water 2,0 bar for atomization
 Pressure pump 0,5 bar
 Size Ø 1.0 mm 8 click



spraycolor®

VS03

DATASHEET

- HVLP -

MODEL

VS03

TECHNOLOGY	HVLP
AIR CONSUMPTION HEAD TYPE "ECOLOGY"	220 l/min
WEIGHT	780 gr.
RECOMMENDED AIR CYLINDER	3,5 bar MAX 4 bar
RECOMMENDED AIR ATOMIZATION	start 1,8 to 2,4 bar
INLET PIGMENT	$\frac{1}{4}$ "
INLET AIR ATOMIZATION	$\frac{1}{4}$ "
INLET AIR CYLINDER	$\frac{1}{4}$ "
RECOMMENDED VISCOSITY	LOW - MEDIUM - HIGH
KIT SIZE AVIABLE	Ø 0.8 - Ø 1.0 - Ø 1.2 - Ø 1.5 - mm

ADVANTAGES: 1 Certified UNI EN 13966-1.
2 XL size spray pattern.
3 Compact design.
4 High transfer of chemical product.
5 Best possible finish for an HVLP.