


Technical data sheet

VSE – spare part list

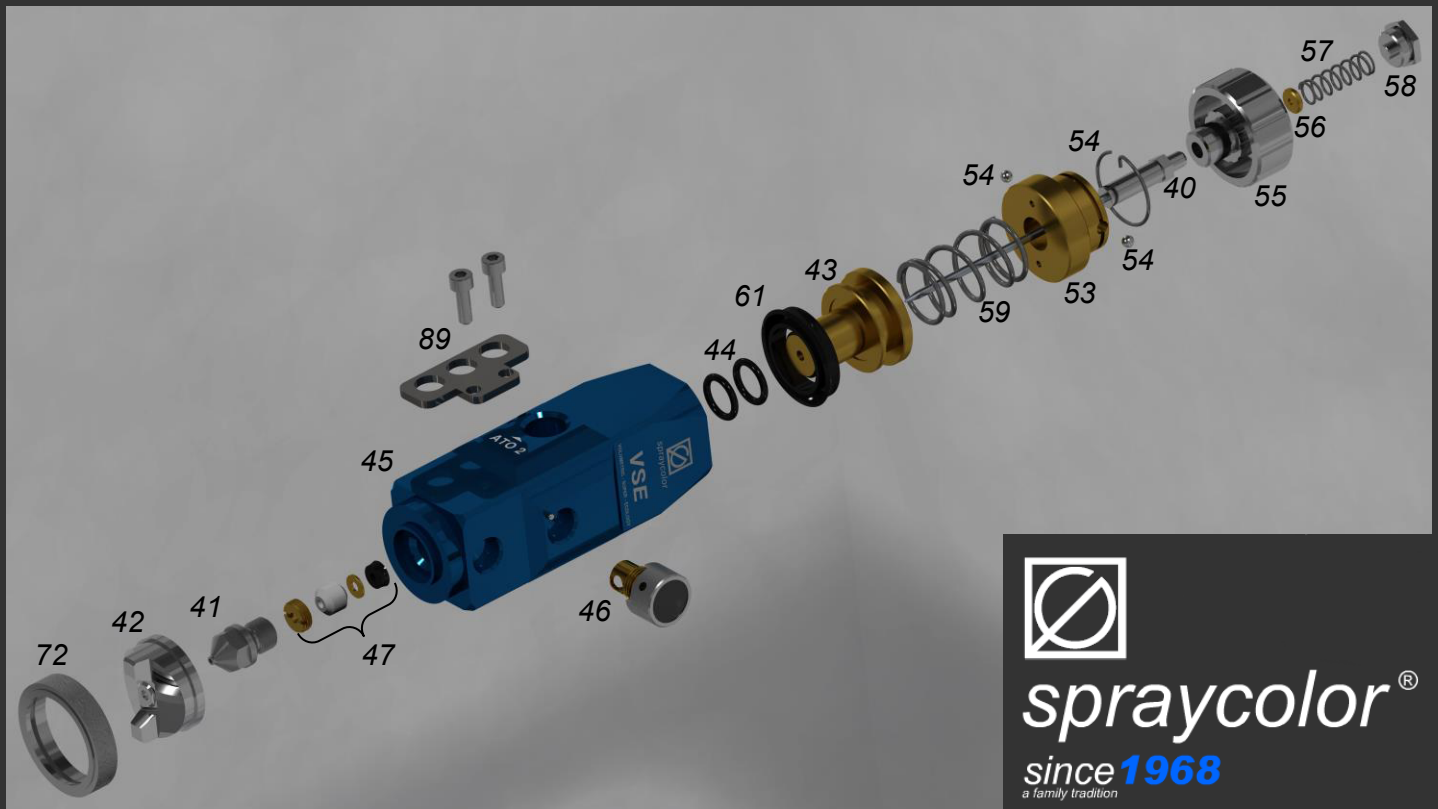

spraycolor®

since **1968**
a family tradition

40. NEEDLE
41. NOZZLE
42. HEAD
43. PISTON
44. O-RING GASKET (2 PCS.)
45. MAIN BODY
46. KIT AIR ADJUSTMENT
47. NEEDLE GASKET
53. CYLINDER PLUG



54. BALLS+ELASTIC RING KIT
55. PAINT ADJUSTMENT KNOB
56. WASHER
57. NEEDLE SPRING
58. SPRING PLUG
59. PISTON SPRING
61. PISTON GASKET
72. HEAD NUT
89. BODY HOLDER

spraycolor[®]

VSE


DATASHEET

- volumetric -

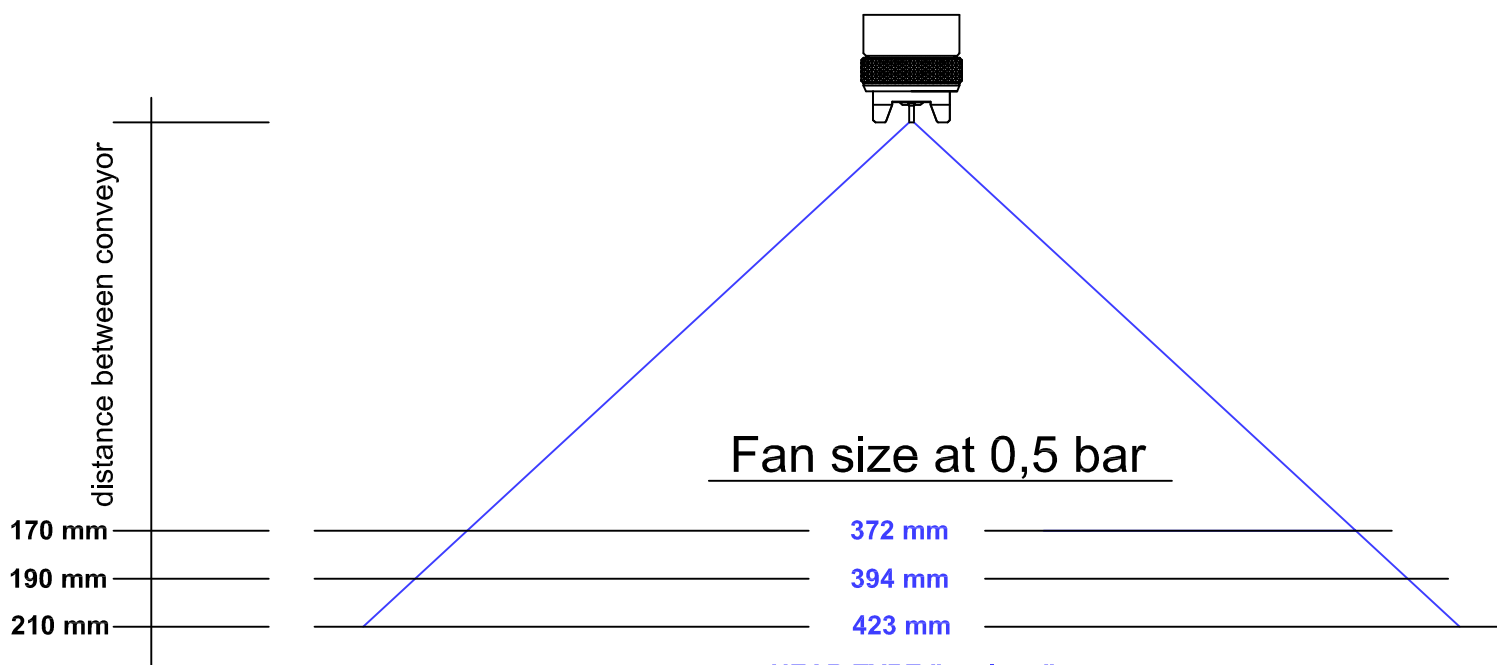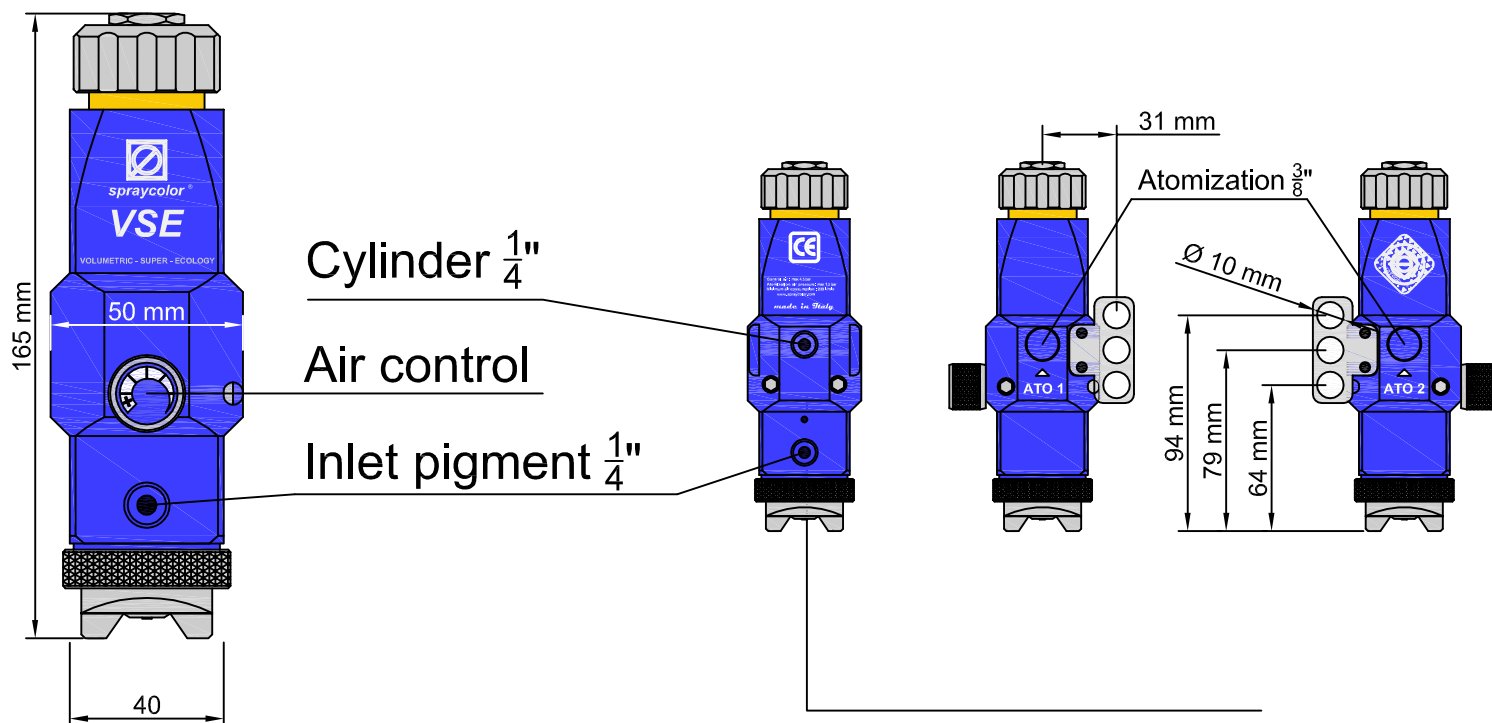

HEAD TYPE "ecology"

* Test with water 0,5 bar for atomization
Pressure pump 0,5 bar
Size Ø 1.0 mm 8 click



spraycolor®

VSE

DATASHEET

- VOLUMETRIC -

MODEL

VSE

TECHNOLOGY	VOLUMETRIC
AIR CONSUMPTION HEAD TYPE "ECOLOGY"	280 l/min
WEIGHT	850 gr.
RECOMMENDED AIR CYLINDER	3,5 MAX 4 bar
RECOMMENDED AIR ATOMIZATION	start 0,4 to 1,0 bar
INLET PIGMENT	$\frac{1}{4}$ "
INLET AIR ATOMIZATION 1 AND 2	$\frac{3}{8}$ "
INLET AIR CYLINDER	$\frac{1}{4}$ "
RECOMMENDED VISCOSITY	LOW - MEDIUM - HIGH
KIT SIZE AVIABLE	Ø 0.8 - Ø 1.0 mm

ADVANTAGES: 1 Very high finish.
2 No smoke to be purified.
3 Working pressure 0,4 bar.
4 High transfer index.
5 Installable on any plant preset for volumetric systems.